


AIRE ACONDICIONADO SPLIT COMERCIAL

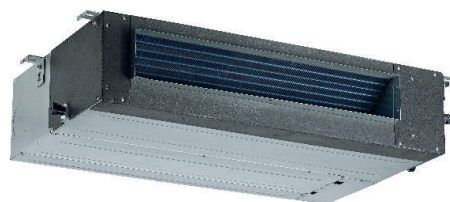

**VARIEDAD
MODELOS**

**CONTROL AUTOMÁTICO
TERMOSTATO ALÁMBRICO**

**REFRIGERANTE
ECOLÓGICO**

SPLIT CASSETTE			12.000 BTU	18.000 BTU	24.000 BTU	36.000 BTU	48.000 BTU
Fuente de Alimentación		V-ph-Hz	220-240-1-50	220-240-1-50	220-240-1-50	380-415-3-50	380-415-3-50
Refrigeración	Capacidad	Btu/h	12061	18152	22584	36761	45103
	Potencia de Entrada	W	1414	2038	2724	3904	5374
	Corriente Nominal	A	6	8.78	12.48	8.2	9.2
	EER	W/W	2.5	2.61	2.43	2.76	2.46
Calefacción	Capacidad	Btu/h	12676	18036	24969	36614	46663
	Potencia de Entrada	W	1397	1673	2447	3779	4749
	Corriente Nominal	A	5.9	7.63	11.52	7.7	8.5
	COP	W/W	2.66	3.16	2.99	2.84	2.88
Consumo Máximo		W	1800	2950	3450	4950	6300
Amperaje Máximo		A	8.5	15	18	10	10.9
Amperaje de Partida		A	25	38	59	51	66
Unidad Interior	Dimensiones Cuerpo (ancho x profundidad x alto)	mm	570x570x260	570x570x260	840x840x205	840x840x245	840x840x245
	Embalaje (ancho x profundidad x alto)	mm	655x655x290	655x655x290	900x900x217	900x900x257	900x900x257
	Dimensiones Panel (ancho x profundidad x alto)	mm	647x647x50	647x647x50	950x950x55	950x950x55	950x950x55
	Peso Cuerpo Neto/Bruto	Kg	16.3/19.1	16.5/19	22.1/25.5	25/28.5	27/32
	Peso Panel Neto/Bruto	Kg	2.5/4.5	2.5/4.5	5/8	5/8	5/8
Nivel de Ruido Exterior		dB(A)	59	62	62	66	63
Unidad Exterior	Dimensiones (ancho x profundidad x alto)	mm	770x300x555	770x300x555	845x363x702	946x410x810	900x350x1170
	Embalaje (ancho x profundidad x alto)	mm	900x345x585	900x348x615	965x395x755	1090x500x875	1032x443x1307
	Peso Neto/Bruto	Kg	30.5/32.9	36.5/38.8	52.7/56.1	75/82	93.2/105
Tipo de Refrigerante/Carga Refrigerante		g	R410A/1100g	R410A/1500g	R410A/1800g	R410A	R410A/3250g
Control			Control Remoto	Control Remoto	Control Remoto	Control Remoto	Control Remoto

SPLIT DUCTO BAJA SILUETA			18.000 BTU	24.000 BTU	36.000 BTU	48.000 BTU	60.000 BTU
Fuente de Alimentación		V-ph-Hz	220-240-1-50	220-240-1-50	380-415-3-50	380-420-3-50	380-420-3-50
Refrigeración	Capacidad	Btu/h	17087	23382	31909	45500	51200
	Potencia de Entrada	W	2044	2774	3711	5240	6090
	Corriente Nominal	A	8.82	12.72	6.7	7.6	
	EER	W/W	2.45	2.47	2.52	2.54	2.46
Calefacción	Capacidad	Btu/h	18834	25467	38931	53000	60000
	Potencia de Entrada	W	1741	2505	3657	4400	5460
	Corriente Nominal	A	7.8	12	6	6.4	7.9
	COP	W/W	3.17	2.98	3.12	3.53	3.22
Consumo Máximo		W	2950	3450	4950	6300	7500
Amperaje Máximo		A	15	18	10	10.9	12.6
Unidad Interior	Dimensiones (ancho x profundidad x alto)	mm	920x635x210	920x635x270	1140x775x270	1200x865x300	1200x865x300
	Embalaje (ancho x profundidad x alto)	mm	1135x655x290	1150x655x350	1355x795x350	1385x920x373	1385x920x373
	Peso Neto/Bruto	Kg	24/28	26.5/32	34.6/41.8	44.5/53	47/55
Unidad Exterior	Dimensiones (ancho x profundidad x alto)	mm	770x300x555	845x363x702	946x410x810	900x340x1167	900x340x1167
	Embalaje (ancho x profundidad x alto)	mm	900x348x615	965x395x755	1090x500x875	1032x443x1307	1032x443x1307
	Peso Neto/Bruto	Kg	36.5/38.8	52.7/56.1	75/82	94/106	99/109
Tipo de Refrigerante			R410A	R410A	R410A	R410A	R410A
Control			Control Alámbrico	Control Alámbrico	Control Alámbrico	Control Alámbrico	Control Alámbrico